

# SmartSolar Charge Controller MPPT 150/35 & 150/45

www.victronenergy.com




**SmartSolar Charge Controller  
MPPT 150/35**



**Bluetooth sensing  
Smart Battery Sense**



**Bluetooth sensing  
BMV-712 Smart Battery Monitor**

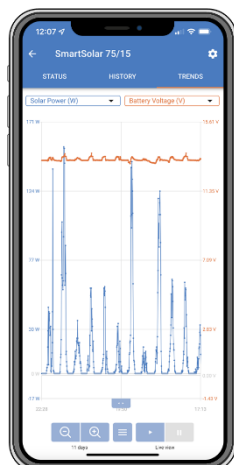

## Bluetooth Smart built-in

The wireless solution to set-up, monitor, update and synchronise SmartSolar Charge Controllers.

## VE.Direct

For a wired data connection to a Color Control GX, other GX products, PC or other devices

## Ultrafast Maximum Power Point Tracking (MPPT)

Especially in case of a clouded sky, when light intensity is changing continuously, an ultra-fast MPPT controller will improve energy harvest by up to 30 % compared to PWM charge controllers and by up to 10 % compared to slower MPPT controllers.

## Advanced Maximum Power Point Detection in case of partial shading conditions

If partial shading occurs, two or more maximum power points may be present on the power-voltage curve. Conventional MPPTs tend to lock to a local MPP, which may not be the optimum MPP.

The innovative BlueSolar algorithm will always maximize energy harvest by locking to the optimum MPP.

## Outstanding conversion efficiency

No cooling fan. Maximum efficiency exceeds 98 %. Full output current up to 40 °C (104 °F).

## Flexible charge algorithm

Fully programmable charge algorithm (see the software page on our website), and eight preprogrammed algorithms, selectable with a rotary switch (see manual for details).

## Extensive electronic protection

- Over-temperature protection and power derating when temperature is high.
- PV short circuit and PV reverse polarity protection.
- PV reverse current protection.

## Internal temperature sensor

Compensates absorption and float charge voltage for temperature.

## Optional external battery voltage and temperature sensing via Bluetooth

A Smart Battery Sense or a BMV-712 Smart Battery Monitor can be used to communicate battery voltage and temperature to one or more SmartSolar Charge Controllers.

## Fully discharged battery recovery function

Will initiate charging even if the battery has been discharged to zero volts.

Will reconnect to a fully discharged Li-ion battery with integrated disconnect function.

| SmartSolar Charge Controller                                                                                                                                                                                                                                                            | MPPT 150/35                                                                                                                    | MPPT 150/45 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------|
| Battery voltage                                                                                                                                                                                                                                                                         | 12 / 24 / 48 V Auto Select<br>(software tool needed to select 36 V)                                                            |             |
| Rated charge current                                                                                                                                                                                                                                                                    | 35 A                                                                                                                           | 45 A        |
| Nominal PV power 1a, b)                                                                                                                                                                                                                                                                 | 35 A 12 V: 500 W / 24 V: 1000 W / 36 V: 1500 W / 48 V: 2000 W<br>45 A 12 V: 650 W / 24 V: 1300 W / 36 V: 1950 W / 48 V: 2600 W |             |
| Max. PV short circuit current 2)                                                                                                                                                                                                                                                        | 40 A                                                                                                                           | 50 A        |
| Maximum PV open circuit voltage                                                                                                                                                                                                                                                         | 150 V absolute maximum coldest conditions<br>145 V start-up and operating maximum                                              |             |
| Maximum efficiency                                                                                                                                                                                                                                                                      | 98 %                                                                                                                           |             |
| Self-consumption                                                                                                                                                                                                                                                                        | 12 V: 20 mA 24 V: 15 mA 48 V: 10 mA                                                                                            |             |
| Charge voltage 'absorption'                                                                                                                                                                                                                                                             | Default setting: 14,4 / 28,8 / 43,2 / 57,6 V (adjustable)                                                                      |             |
| Charge voltage 'float'                                                                                                                                                                                                                                                                  | Default setting: 13,8 / 27,6 / 41,4 / 55,2 V (adjustable)                                                                      |             |
| Charge algorithm                                                                                                                                                                                                                                                                        | multi-stage adaptive (eight pre-programmed algorithms)                                                                         |             |
| Temperature compensation                                                                                                                                                                                                                                                                | -16 mV / -32 mV / -64 mV / °C                                                                                                  |             |
| Protection                                                                                                                                                                                                                                                                              | PV reverse polarity / output short circuit / over-temperature                                                                  |             |
| Operating temperature                                                                                                                                                                                                                                                                   | -30 to +60°C (full rated output up to 40°C)                                                                                    |             |
| Humidity                                                                                                                                                                                                                                                                                | 95 %, non-condensing                                                                                                           |             |
| Data communication port                                                                                                                                                                                                                                                                 | VE.Direct<br>See the data communication white paper on our website                                                             |             |
| ENCLOSURE                                                                                                                                                                                                                                                                               |                                                                                                                                |             |
| Colour                                                                                                                                                                                                                                                                                  | Blue (RAL 5012)                                                                                                                |             |
| Power terminals                                                                                                                                                                                                                                                                         | 16 mm² / AWG6                                                                                                                  |             |
| Protection category                                                                                                                                                                                                                                                                     | IP43 (electronic components), IP22 (connection area)                                                                           |             |
| Weight                                                                                                                                                                                                                                                                                  | 1,25 kg                                                                                                                        |             |
| Dimensions (h x w x d)                                                                                                                                                                                                                                                                  | 130 x 186 x 70 mm                                                                                                              |             |
| STANDARDS                                                                                                                                                                                                                                                                               |                                                                                                                                |             |
| Safety                                                                                                                                                                                                                                                                                  | EN/IEC 62109-1, UL 1741, CSA C22.2                                                                                             |             |
| STORED TRENDS                                                                                                                                                                                                                                                                           |                                                                                                                                |             |
| Data stored                                                                                                                                                                                                                                                                             | Battery voltage,current and temperature, as well as load output current, PV voltage and PV current.                            |             |
| Number of days trends data is stored                                                                                                                                                                                                                                                    | 46                                                                                                                             |             |
| 1a) If more PV power is connected, the controller will limit input power.<br>1b) The PV voltage must exceed Vbat + 5 V for the controller to start.<br>Thereafter the minimum PV voltage is Vbat + 1 V.<br>2) A PV array with a higher short circuit current may damage the controller. |                                                                                                                                |             |