



# **TIGO ACCESS POINT (TAP)**

The Tigo Access Point (TAP) improves the data management of your solar array by wirelessly communicating with Tigo smart modules and retrofit devices. TAP also greatly improves safety with module-level deactivation.

When paired with a Cloud Connect Advanced (CCA), the TAP provides unparalleled visibility into your solar installation.


## **VISIBILITY**

Communicate directly with TS4 units using the Tigo SMART app on a mobile device for the fastest commissioning.

# **SAFETY**

Provide grid status to TS4 MLPE for rapid shutdown UL compliance.

# **EASE OF INSTALLATION**

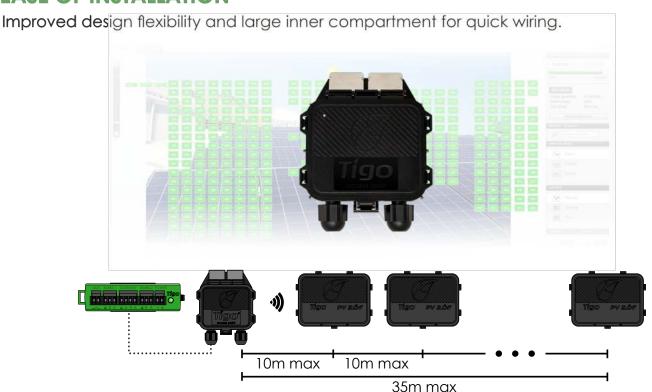

TIGO ACCESS POINT (TAP)


Collect data from up to 300 TS4 units\*

Wireless mesh communication

High definition sampling rate


Scalable architecture


Mounts easily on module frame without tools

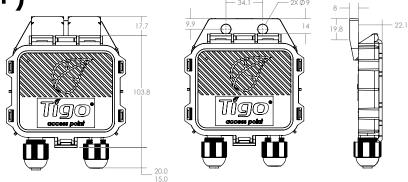

BRACKET MOUNT POSITION: TOP

BRACKET MOUNT POSITION: SIDE





#### **Electrical Specifications**

Input voltage range: 5V<sub>DC</sub> - 25V<sub>DC</sub>

Consumption: 0.5W average, 1W peak

Recommended cable type: RS485, 18-22AWG

#### **Mechanical Specifications**

Dimensions: 126.2mm x 130.0mm x 26.8mm (with bracket)

Weight: 227g (0.5lbs)

Operating temperature range: -30°C to +70°C (-22°F to +158°F)

Environmental rating: IP68, Type 4R

#### Range and Capacity

Maximum distance from TAP to closest TS4: 10m (33ft)

Maximum distance from TAP to farthest TS4: 35m (115ft)

Each TAP supports up to 300 TS4 units\* \*environmental conditions can impact the number of units supported

# ORDERING OPTIONS

Item #

**Description** 

158-00000-02 TAP, standalone











## For sales info:

sales@tigoenergy.com or 1.408.402.0802

## For product info:

Visit tigoenergy.com/products

#### For technical info:

Visit support.tigoenergy.com

For additional info and product selection assistance, use Tigo's online design tool at tigoenergy.com/design



